


2(a), FULL - ENCAPSULATED SPLIT TEE

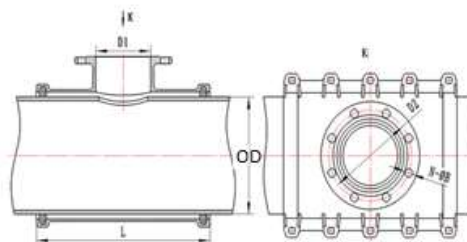

* Material: Ductile cast iron QT450-10.

* Specification note: DN400X500-200, means the clamp can be used for Nominal Diameter 400mm cast iron pipe and the tapping hole is 200mm.and the full-encapsulated length is 500mm.

S/N	Specification	Suitable for Pipe Outside diameter (mm)	L	D1	D2	N	B
1	DN100X250-100	100 - 118	250	108	180	8	18
2	DN100X500-100	100 - 118	500	108	180	8	18
3	DN150X250-100	150 - 170	250	108	180	8	18
4	DN150X250-150	150 - 170	250	158	240	8	23
5	DN150X500-100	150 - 170	500	108	180	8	18
6	DN150X500-150	150 - 170	500	158	240	8	23
7	DN200X500-100	200 - 222	500	108	180	8	18
8	DN200X500-150	200 - 222	500	158	240	8	23
9	DN200X500-200	200 - 222	500	208	295	8	23

2(b), FULL - ENCAPSULATED SPLIT TEE

S/N	Specification	Suitable for Pipe Outside diameter (mm)	L	D1	D2	N	B
10	DN250X500-100	250 - 274	500	108	180	8	18
11	DN250X500-150	250 - 274	500	158	240	8	23
12	DN250X500-200	250 - 274	500	208	295	8	23
13	DN300X500-100	300 - 326	500	108	180	8	18
14	DN300X500-150	300 - 326	500	158	240	8	23
15	DN300X500-200	300 - 326	500	208	295	8	23
16	DN300X500-300	300 - 326	500	308	400	12	23
17	DN350X500-100	350 - 378	500	108	180	8	18
18	DN350X500-150	350 - 378	500	158	240	8	23
19	DN350X500-200	350 - 378	500	208	295	8	23
20	DN350X500-300	350 - 378	500	308	400	12	23
21	DN400X500-100	400 - 429	500	108	180	8	18
22	DN400X500-150	400 - 429	500	158	240	8	23
23	DN400X500-200	400 - 429	500	208	295	8	23
24	DN400X500-300	400 - 429	500	308	400	12	23
25	DN400X750-400	400 - 429	750	400	515	16	28
26	DN500X500-100	500 - 532	500	108	180	8	18
27	DN500X500-150	500 - 532	500	158	240	8	23
28	DN500X500-200	500 - 532	500	208	295	8	23
29	DN500X500-300	500 - 532	500	308	400	12	23
30	DN500X750-400	500 - 532	750	408	515	16	28
31	DN500X750-500	500 - 532	750	500	620	20	28
32	DN600X500-100	600 - 635	500	108	180	8	18
33	DN600X500-150	600 - 635	500	158	240	8	23
34	DN600X500-200	600 - 635	500	208	295	8	23

2(c), FULL - ENCAPSULATED SPLIT TEE

S/N	Specification	Suitable for Pipe Outside diameter (mm)	L	D1	D2	N	B
35	DN600X650-300	600 - 635	650	308	400	12	23
36	DN600X650-400	600 - 635	650	408	515	16	28
37	DN600X750-400	600 - 635	750	408	515	16	28
38	DN600X750-500	600 - 635	750	508	620	20	28
39	DN600X1000-600	600 - 635	1000	600	725	20	31
40	DN20X100-20	20 - 26.8	100	ZG3/4"			
41	DN25X100-20	25 - 33.5	100	ZG3/4"			